
Philmetal

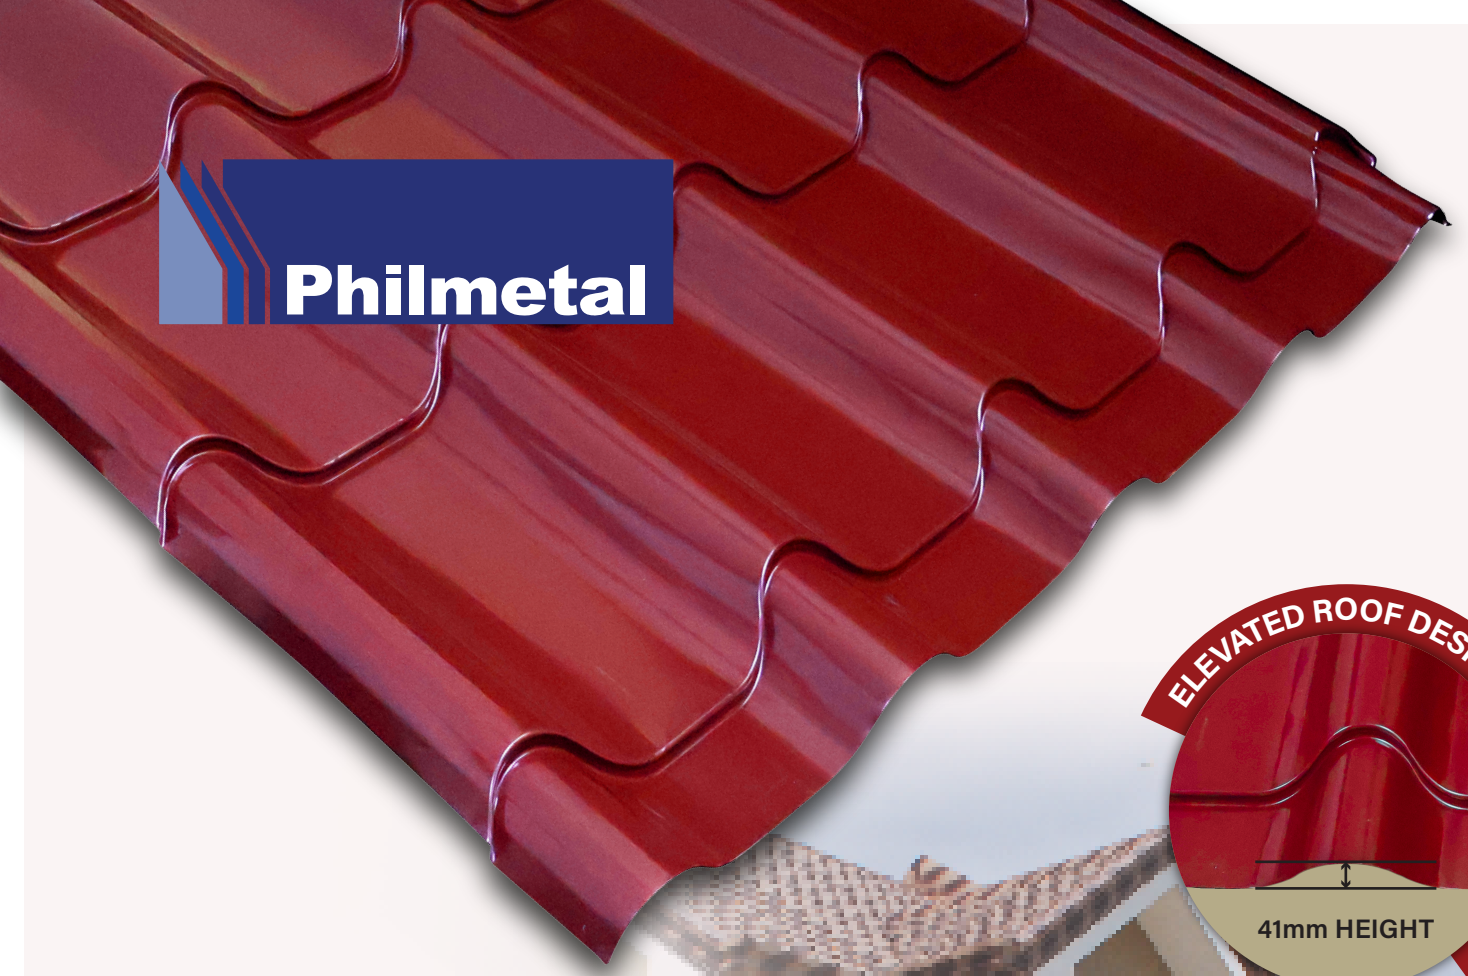

Colorbond®

RUSKO TILE

ELEVATED ROOF DESIGN & PERFORMANCE

Classic Tile Look. Engineered Steel Performance. Designed for Tropical Living.

- Premium Tile Design for Lasting Impression
- 41mm Rib-Height for Faster Drain-Off

AESTHETICS & FUNCTIONALITY COMBINED






BUILT TO LAST ROOFING

Available in different colors
(may vary from actual product)

BAGUIO GREEN | SAMAR BEIGE | SPANISH RED | UMBRA GRAY | MS RED | BATANGAS BROWN | DepEd BLUE | PACIFIC BLUE

Colorbond®

RUSKO TILE

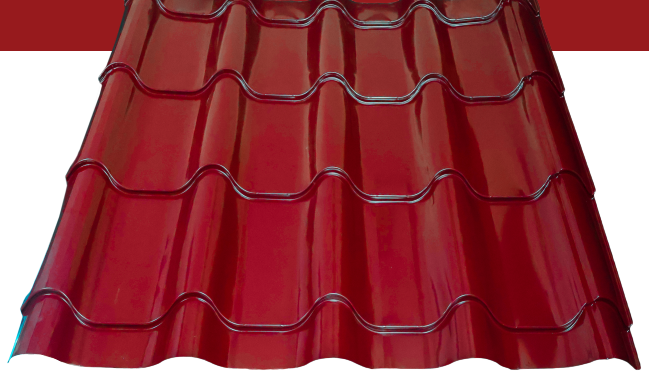

GENERAL PRODUCT INFORMATION

BASE METAL TYPE: Cold Rolled Steel: 275MPa (40,000 psi.)

SUBSTRATE: GALVALUME 55™, Zinc-Aluminum alloy coated steel complying with ISO 9364. Also available in GALVABOND™; Lock Forming Quality (PNS 67:2000)

PAINT COATING STANDARD:
Double oven-baked epoxy primer and high grade polyester finish.

OPTIONAL: Premium Fluorocarbon (PVdF) paint finish on top of corrosion-resistant epoxy primer

AVAILABLE THICKNESSES: 0.40mm to 0.80mm

LENGTH: Longspan

WIDTH: Nominal Width = 1095mm
Effective Coverage = 990mm

APPLICATIONS: Roofing


STANDARD COLORS: Dep Ed Blue, Pacific Blue, Batangas Brown, MS Red, Umbra Gray, Spanish Red, Samar Beige, Baguio Green. Special colors are available upon request.

RECOMMENDED FASTENERS:
STEEL: Teks # 12-24 x 65mm with Rubber washer
WOOD: Teks # 12-11 x 65mm with Rubber washer

ACCESSORIES



ROLLFORMED RIDGE ROLL WITH EMBOSSMENT
THICKNESSES : 0.40, 0.50 & 0.60
LENGTH : 2.44mm or longspan



EDGE CAP
THICKNESSES : 0.50
NO. OF PIECES PER PANEL : 2

RUSKO SERIES JAN2026

RECOMMENDED FASTENER LAYOUT

